



● 订购码 Ordering Code

OU	1/4	□	□	MINI
型号 Model	接口尺寸 Conection Dimension	过滤等级 Grade of filtration	压力表 Pressure Gauge	尺寸/Size
	G1/8" G1/4" G3/8" G1/2" G3/4" G1"	空白/Blank:40um 5M:5um	12bar 7:7bar	MINI小型 MIDI中型 MAXI大型


● 图形符号 Symbol



● 规格 Specification

过滤减压阀 Filter regulators		MINI型			MIDI型			MAXI型	
手动排水阀 Manual Valve	工作压力 Working pressure:12bar,40 μ m	OU-1/8-MINI	OU-1/4-MINI	OU-3/8-MINI	OU-3/8-MIDI	OU-1/2-MIDI	OU-3/4-MIDI	OU-3/4-MAXI	OU-1-MAXI
	工作压力 Working pressure:12bar,40 μ m	OU-1/8-7-MINI	OU-1/4-D-7-MINI	OU-3/8-7-MINI	OU-3/8-7-MIDI	OU-1/2-7-MIDI	OU-3/4-7-MIDI	OU-3/4-7-MAXI	OU-1-7-MAXI
	工作压力 Working pressure:12bar,40 μ m	OU-1/8-5M-MINI	OU-1/4-5M-MINI	OU-3/8-5M-MINI	OU-3/8-5M-MIDI	OU-1/2-5M-MIDI	OU-3/4-5M-MIDI	OU-3/4-5M-MAXI	OU-1-5M-MAXI
手动排水阀 Automatic Valve	工作压力 Working pressure:12bar,40 μ m	OU-1/8-MINI-A	OU-1/4-MINI-A	OU-3/8-MINI-A	OU-3/8-MIDI-A	OU-1/2-MIDI-A	OU-3/4-MIDI-A	OU-3/4-MAXI-A	OU-1-MAXI-A
	工作压力 Working pressure:12bar,40 μ m	OU-1/8-7-MINI-A	OU-1/4-D-7-MINI-A	OU-3/8-7-MINI-A	OU-3/8-7-MIDI-A	OU-1/2-7-MIDI	OU-3/4-7-MIDI-A	OU-3/4-7-MAXI-A	OU-1-7-MAXI-A
	工作压力 Working pressure:12bar,40 μ m	OU-1/8-5M-MINI-A	OU-1/4-5M-MINI-A	OU-3/8-5M-MINI-A	OU-3/8-5M-MIDI-A	OU-1/2-5M-MIDI	OU-3/4-5M-MIDI-A	OU-3/4-5M-MAXI-A	OU-1-5M-MAXI-A
压力表 Pressure Gauge	0-12bar	OMA-40-16-1/8			OMA-50-16-1/4				
	0-7bar	OMA-40-10-1/8			OMA-50-10-1/4				
工作介质 Working medium	压缩空气 Compressed air								
结构特点 Features of structure	带水分离合器的烧结式过滤器; MINI/MIDI:膜片式减压阀; MAXI:活塞减压阀 Sintered filter with water separator; MINI/MIDI:Diaphragm type regulator;								
安装方式 Mounting type	管式安装或支架安装 Pipe mounting or foot mounting								
安装位置 Assembly position	垂直方向 ±5° Vertical ±5°								
连接尺寸 Dimension		G1/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
标准额定 流量 Standard nominal flow rate	OU-...(-A)	750	1400	1600	3100	3400	3400	9000	10000
	OU-...-7(-A)	900	1500	1700	3400	3900	4000	9500	16000
	OU-...-5M(-A)	650	1200	1350	2400	2500	2600	7300	7600
输入压力 Primary pressure	手动排水阀 Manuale Valve ORain	1-16bar							
	自动排水阀 Automatic Valve ORain	1.5-12bar							
工作压力 Working pressure	0.5-12bar/0.5-7bar								
最小起雾容量 Min.Stangard nominal flow rate	31/min			61/min			10/min		
过滤精度 Filter Precision	40 μ m/5 μ m								
最大凝露容量 Capacity of condensate fluid	22ml								
温度范围 Temperature range	0-60℃								
材料 Materials information	壳体; 压铸锌; 过滤器:PC;金属保护罩:铝合金;密封:丁腈橡胶;调压手轮:POM Housing:Zinc die casting;Filter bowl:PC;Meta bowl guard:Aluminium alloy;Sealing:NBR;Adjusting knob:POM								

● 外形尺寸 Overall Dimension

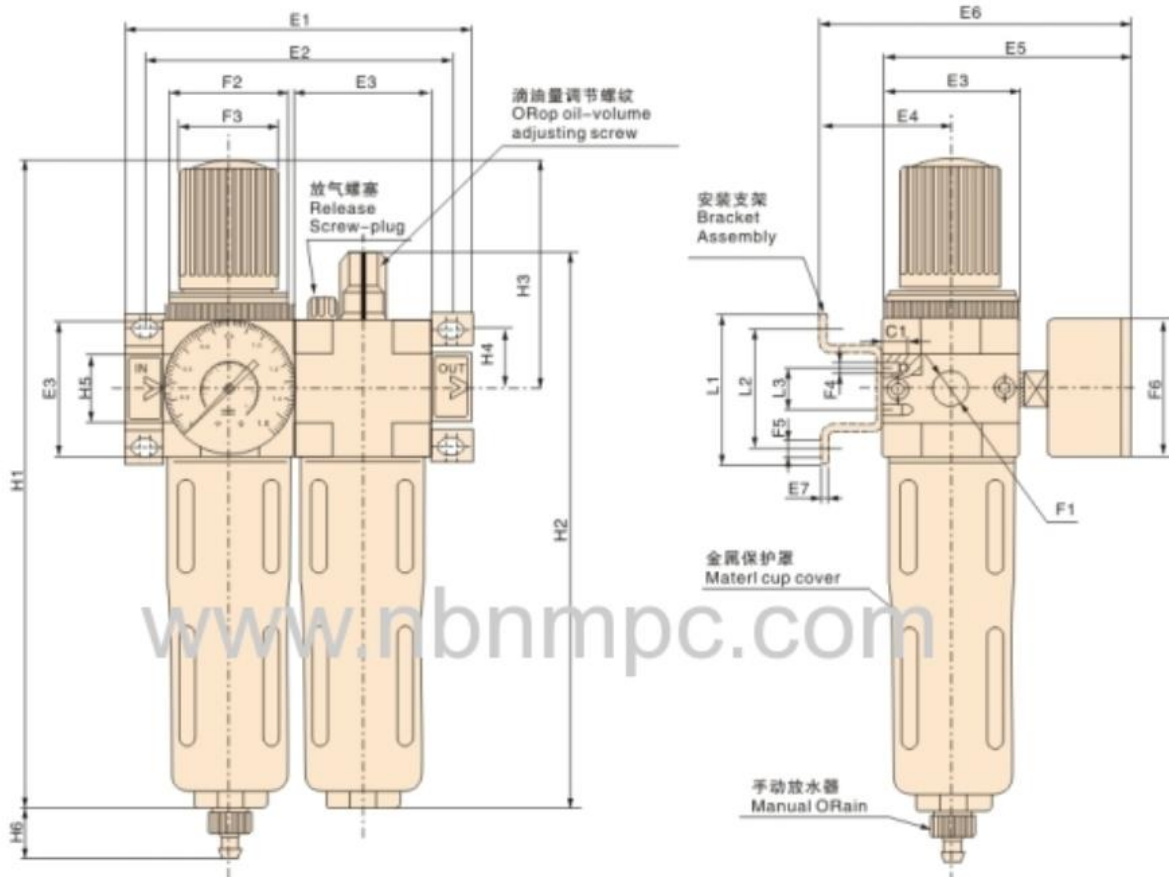

● 尺寸表 Dimension Sheet

型号 Model	E1	E2	E3	E4	E5	E6	E7	F1	F2
OU-...-MAXI	104	92	40	39	76	95	2	G1/8" G1/4" G3/8"	M36×1.5
OU-...-MINI	140	125	55	47	93	112	3	G1/8" G1/2" G3/4"	M52×1.5
OU-...-MIDI	162,182	146,157	66	53	104	124	3	G3/4" G1"	M36×1.5

型号 Model	F3Φ	F4	F5Φ	F6Φ	L1	L2	L3	H1	H2	H3	H4	H5	H6
OU-...-MAXI	31	M4	4.5	40	44	35	11	194	169	69	17.5	20	15
OU-...-MINI	50	M5	5.5	52	71	60	22	250	206	98	24.5	32	15
OU-...-MIDI	31	M5	5.5	63	71	60	22	252	223	80	24.5	32/40	15